




PV INSULATION EARTH TESTER KEW 6024PV

No need to short circuit strings for measuring the insulation resistance!

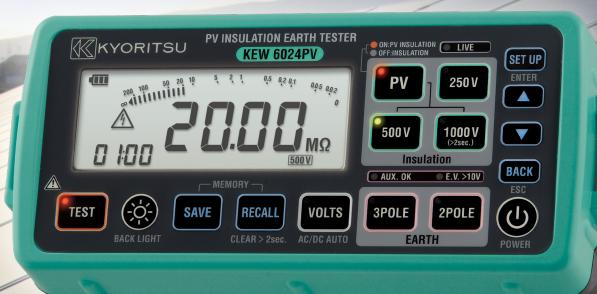

PV Insulation

Insulation

Earth

Volts


CE IP54

- Correct measuring for Insulation resistance even if PV arrays are under generating power
- Waterproof design: Can measure under the bad weather condition
- Memory function up to 1000 data
- Luminescence button and Backlight

KEW 6024PV Specifications

sulation resistance	PV Insulation*		Insulation		
Test voltage	500V	1000V	250V	500V	1000V
Measuring range(Auto range)	20.00/200.0/2000ΜΩ		20.00/200.0/2000ΜΩ		
Mid-scale value	_		50ΜΩ		
Rated current			1.0 - 1.2mA		
		_	0.25ΜΩ	0.5ΜΩ	1ΜΩ
First effective measuring range	1.51 - 200.0MΩ	1.51 - 1000MΩ	1.51 - 100.0MΩ	1.51 - 200.0MΩ	1.51 - 1000MΩ
Accuracy	±1.5%rdg ±5dgt		±1.5%rdg ±5dgt		
Second effective measuring range	0.00 - 1.50MΩ	0.00 - 1.50ΜΩ	1.20 - 1.50MΩ	1.20 - 1.50MΩ	1.20 - 1.50MΩ
	200.1 - 2000ΜΩ	1001 - 2000ΜΩ	100.1 - 2000MΩ	200.1 - 2000ΜΩ	1001 - 2000ΜΩ
Accuracy	±5.0%rdg ±6dgt				
Open circuit voltage	0 - +20%				
Short circuit current	Max 1.5mA				
rth resistance					
Measuring range(Auto range)	20.00/200.0/2000Ω				
Accuracy	±3.0%rdg±0.1Ω (20Ωrange) ±3.0%rdg±3dgt (200/2000Ωrange)				
Itage measurement					
Measuring range	AC 5 - 600V (45 - 65Hz) DC ±5 - ±1000V				
Accuracy	±1.0%rdg±4dgt				
eneral					
Applicable Standards	IEC 61010-1 CAT IV 300V, CAT II 600V Pollution2 IEC 61010-2-030, IEC 61010-031, IEC 60529(IP54), IEC 61557-1,-2,-5,-10, IEC 61326-1,2-2(EMC), EN50581(RoHS)				
Power source	LR6(AA) (1.5V) x 6				
Dimensions / Weight	84(L) x 184(W) x 133(D)mm / Approx. 900g (including batteries)				
Accessories	7196A(Test leads with remote control switch), 7244A(Test lead with alligator clip), 8017(Extension prod), 8072(CAT II standard prod), 8212-USB(USB adaptor with "KEW Report (Software)") 9155(Shoulder strap), 9156(Carrying case), LR6 x 6, Instruction manual, Calibration Certifica				
Optional	7243(L-shaped probe), 7245A(Precision measurement cord set), 8016(Hook type prod)				

^{*6024}PV supports the PV systems up to 1000V.

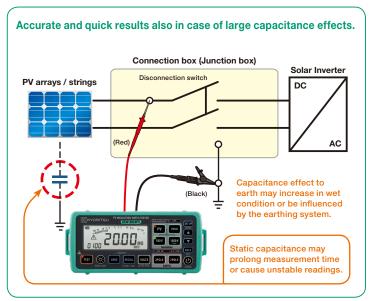




Included Accessories



Optional Accessories

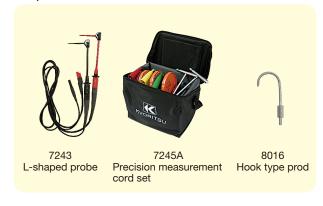



Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and completely Safety Warnings: for correct use. Failure to follow the safety rules can cause fire, trouble, electrical shock, etc. Therefore, make sure to operate the instrument on a correct power supply and voltage rating marked on each instrument.

For inquires or orders :



2-5-20, Nakane, Meguro-ku, Tokyo, 152-0031 Japan Phone:+81-3-3723-0131 Fax:+81-3-3723-0152 E-mail:info-eng@kew-ltd.co.jp

http://www.kew-ltd.co.jp